




MERIDIANS

Endicott Meridians Specifications

The Endicott 16" (nominal) Meridian brick offers design opportunities for a wide range of applications. In addition, Meridians can present significant economies for in-the-wall labor costs.

Meridians are manufactured to meet ASTM C216, Grade SW, Type FBS specifications. These units exhibit similar physical properties as other colors and sizes manufactured by Endicott Clay Products Co.


Technical Data	
Compressive Strength	11,000 to 17,000 psi
24 Hour Cold Water Absorption	2.5% to 7.0%
5 Hour Boil Absorption	3.0% to 9.0%
Efflorescence	None

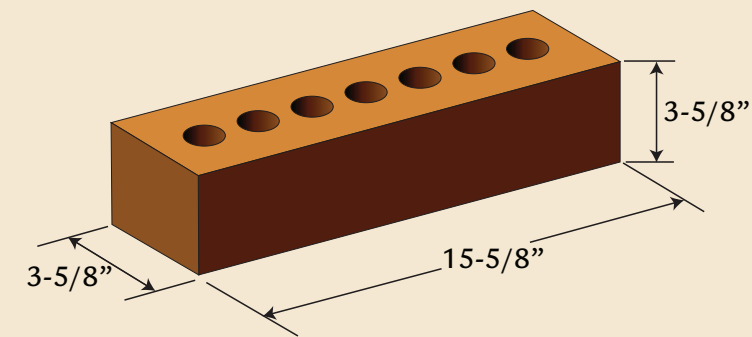

Meridian Brick (coring may vary)




Manganese Ironspot

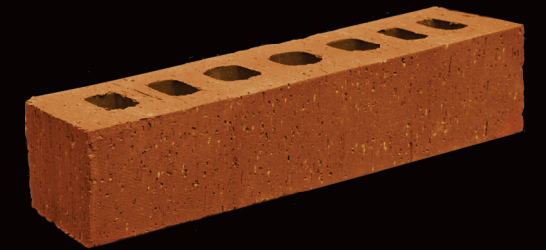

Coppertone



Medium Ironspot #46

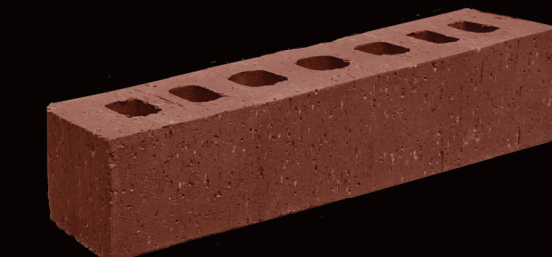

Burgundy Blend



Medium Ironspot #77